

## Fiberglass Onsert Maintenance

The following information is provided to help you in the proper care of fiberglass onserts. With good preventative maintenance, you can extend the life span of fiberglass and eliminate down time for replacement of the product.

### Cleaning


A solution of water and household detergent cleans most fiberglass surfaces. More persistent dirt and marks are removed with the application of a small amount of household cleanser to the affected area. After cleaning, rinse fiberglass surface thoroughly with clean water, wipe with a clean soft cloth and allow to dry.

For removal of ball-point and marking pen inks, rub an alcohol dampened soft clean cloth over the affected area. If ink does not remove with alcohol application, use a semi-paste mixture of six parts Roman® bleach and four parts BAB-O® cleanser. Apply mixture with a soft clean cloth and rub ink spot and immediate area until ink is removed. Rinse with clear water and wipe with a clean damp cloth and allow surface to dry.

### Minor Scratch and Scuff Repair



For deeper scratches, buff the area with lamb's wool buffing wheel, or soft cloth using medium grade buffing compound. Next, rub the area with mineral oil until color blends and wipe with a clean cloth.

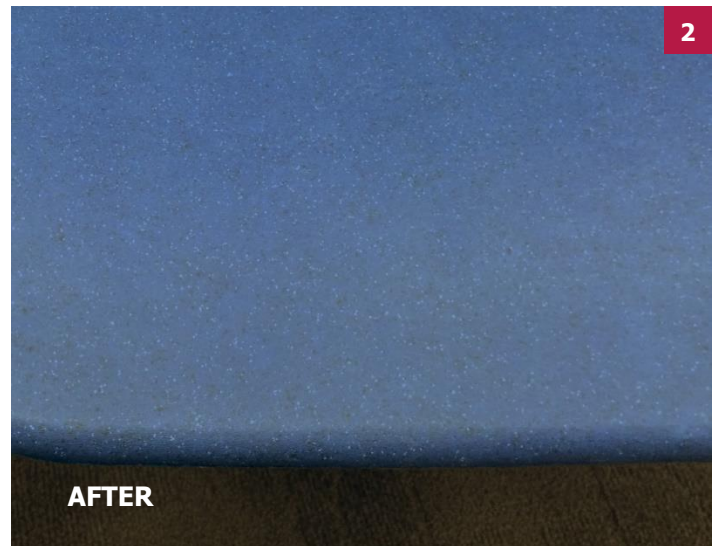

NOTE: Most minor scratches will be unnoticeable with the one step application of mineral oil.